

Hako-Citymaster 2000



DAHA TEMİZ BİR ŞEHİR İÇİN


Hako-Citymaster 2000

ŞEHİRDE YAPILACAK ÇOK İŞ VAR



ATAŞMANLAR

- Cadde, yol ,park ve kaldırımların temizlenmesi.
- Kar kürüme ataşmanı.
- Kar süpürme ataşmanı.
- Vidanjör ataşmanı.
- Tuz ve kumlama ataşmanı

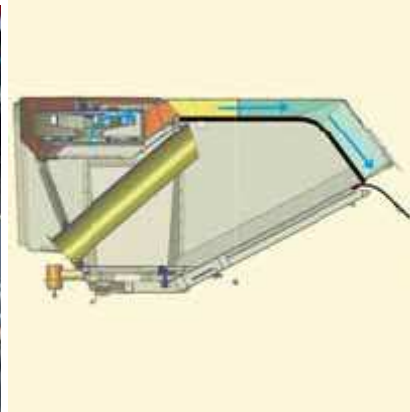

Hako-Citymaster 2000





Teknik veriler.

MOTOR: Water-cooled large size industrial turbo diesel engine, VW 2.0 l, 74.0 kW, IMO EURO IV CBKA, (100 hp) at 3,000 rpm. With maintenance-free soot particulate filter in a closed system. 4 cylinder 4 stroke engine. Injection pump system, water cooling, working revolutions 1900 - 2200 rpm. Regulation of working revolutions via TIP UP-DOWN switch. Emission levels according to Euro 4. Fuel tank 50 litres.

AKTARMA: Hydrostatic drive with electronic control. 2 drive stages to be switched under load, differential lock (acting on rear axle). Drive control with automatic load regulation in transport and work mode or specified engine revolutions (noise limitation).

SÜRÜŞ PERFORMANSI: Transport mode: 0-50 km/h, working mode 0-15 km/h, reverse transport mode 0-25 km/h, reverse working mode: 0-15 km/h.

ŞAŞI VE YÖNETME: Welded frame, dropped in the front part and angled, rigid axles guided at longitudinal swinging arms and Panhard rod, helical spring system, additional rubber and hydraulic shock absorbers.

Hydrostatic front wheel steering with connectible four wheel steering, outer turning radius radius of fixed parts: 3500 mm.

TEKERLEKLER: **Standard:** 4 wheels on 6J 15 H2 ET 50 rims, tyres: 215/70 R 15 C. Special tyres 255/75 R15 available.

FİRENLER: Hydraulic dual circuit brake system with servobrake and load-dependent regulation of braking power on front and rear axle. Tandem vacuum servobrake, automatic brake re-adjustment, mechanical parking brake acting on rear axle.

KABİN: 2-seat full comfort cabin in space frame design with airsprung comfort driver's seat, adjustable to the driver's weight. Ergonomic arrangement of all operational elements. Warm water heating and heated, tinted wrap-around windscreen, made of safety glass, fitted as standard: large glazed doors with sliding windows and large window in the bottom part; folding wing mirrors adjustable from inside; air conditioning system optional.

SÜPÜRME ÜNİTESİ: 1.85 m³ stainless steel tank, hydraulic tilting to 45°, emptying height 1,450 mm. Quick exchange front mounted sweeper unit in view of the driver. Two plate brushes of Ø 900 mm each, hydraulically driven, brush speed and working width adjustable from the driver's seat, side and front collision protection.

Fan: High-performance multi-bladed radial fan, rubber-cushioned and sound-proofed.

Power lift/attachments: Front power lift with 2 double-acting hydraulic cylinders (lifting, lowering, ground pressure) and floating position with quick coupling triangle cat. 1 N. Lifting capacity at coupling triangle 950 daN.



BOYUTLAR VE AĞIRLIKLAR

Fırçalarla uzunluk mm 4.550
Genişlik mm 1.300
Yükseklik (standard tyres) mm 1.995
Yüklü olmayan ağırlık StVZO kg 2.900
Maksimum yüklü ağırlık kg 4.500
Dinçil açıklığı mm 1.900
Genişlik mm 1.033
Maksimum süpürme genişliği mm 2.500
Temiz su tankı l 330